

# INSTRUCTION

722147.003




Bei Fragen zu unseren Symbolen, besuchen sie folgende Webseite:  
If you have any questions about our signs, visit the following website:

[www.rzb.de/fileadmin/assets/downloads/PDF/RZB\\_Symbolklaerung.pdf](http://www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf)



Serie: Home + Basic 450

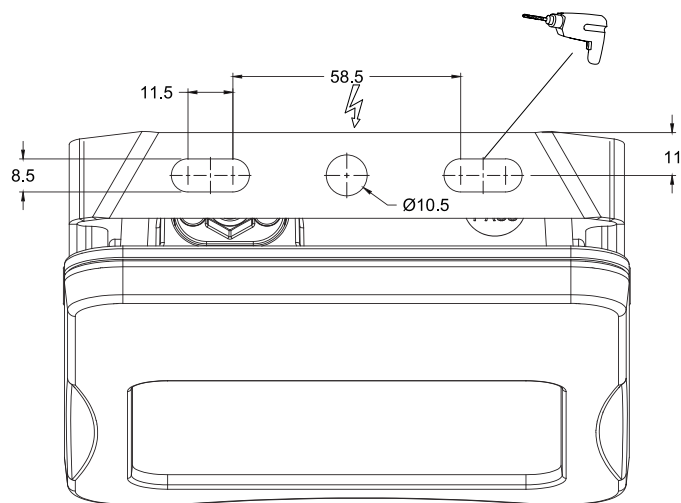

bz1198.cdr  
2019-10-30 PFL

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16  
96052 Bamberg

Telefon: 0951/7909-0

Telefax: 0951/7909-198

E-mail: [info@rzb-leuchten.de](mailto:info@rzb-leuchten.de)

# INSTRUCTION

HB 450

722147.003




220-240V~50/60 Hz ta : 50°C IP 65



3 x 1,0 mm<sup>2</sup>



Umgebungstemperatur / temperature  
ambiante  
=> -20 °C ... + 50 °C



L 195, B 145, H 41



LED




1 x 50 W



5500



50



A+



A+



1.08 kg

CCT [K]

4000

CRI

80

PROJECTED AREA [m<sup>2</sup>]


0.0283



DIN EN 61340-5-1











EN 12464  
EN 1838



EN 12464



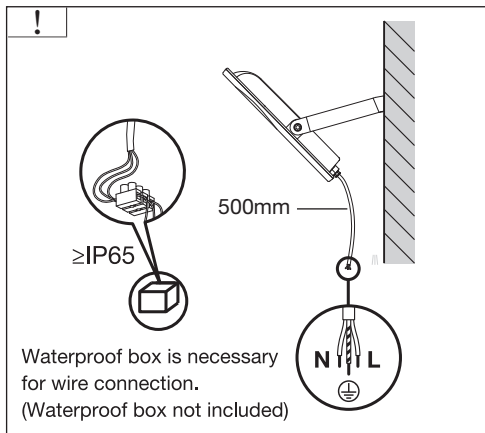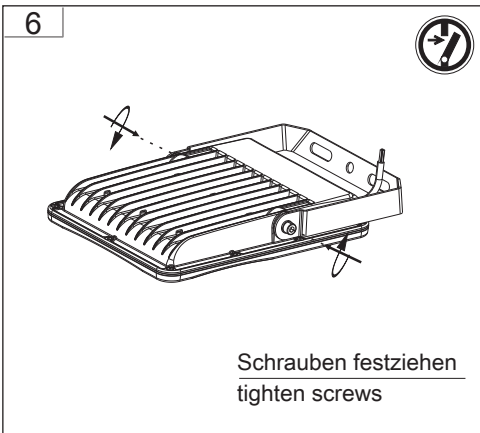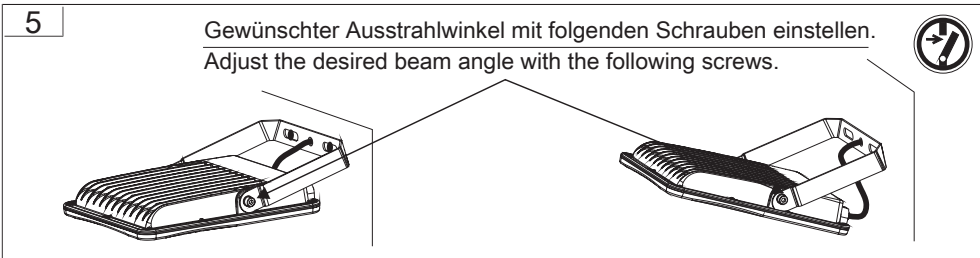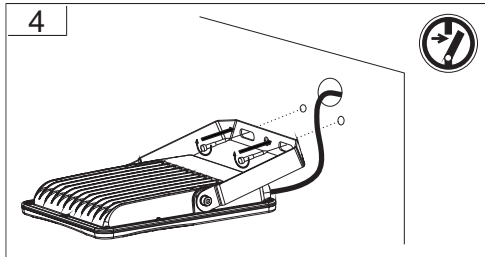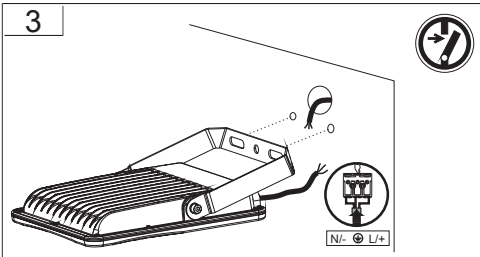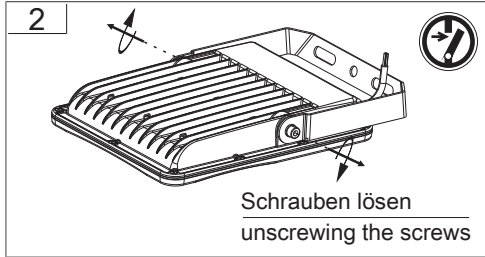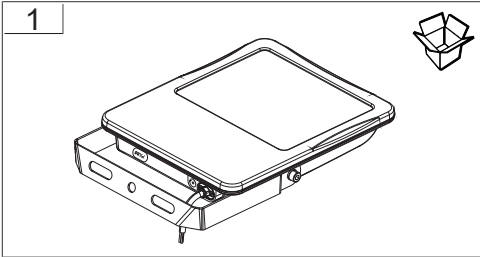

**WARNING:**

- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Do not touch the luminaire in operative status.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Caution, risk of electric shock.



- Range mounting height 15m max.
- Only installed outside the arm's reach.
- Suitable for indoors and outdoors.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges, and lightning strikes, additional surge protectors must be deployed on the primary side.
- Junction box with at least IP65 for supply connection shall be used.
- Terminal block not included. Installation must be performed by a qualified person.