



# INSTRUCTION

Calido  
742129.002.1

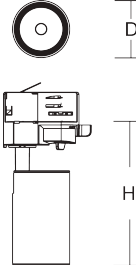

~ 220 - 240 V 50/60 Hz IP 20



742129.002.1

D 50, H 132

180 g



LED

1 x 10,5 W

12 W

1250 lm

CCT

CRI

EEK


EEK

4000 K

80

A++

A++



4,38 A / 24 µs

11

18

22


36




DIN EN 61340-5-1










EN 12464  
EN 13201



EN 12464



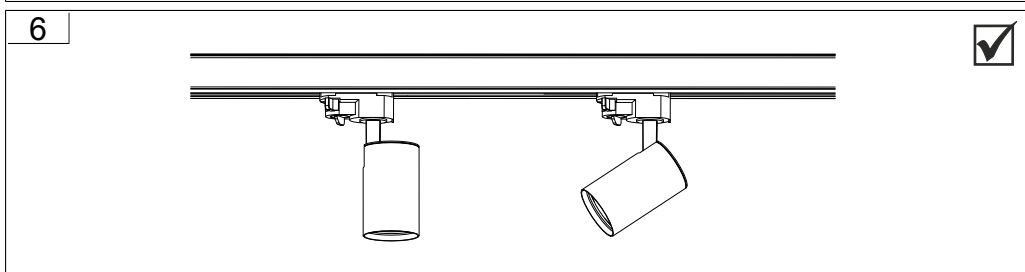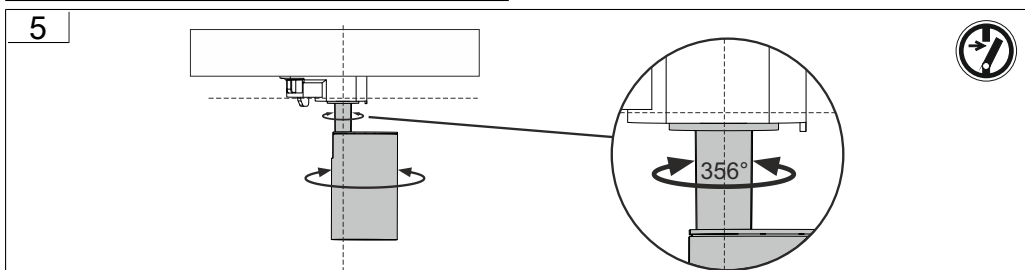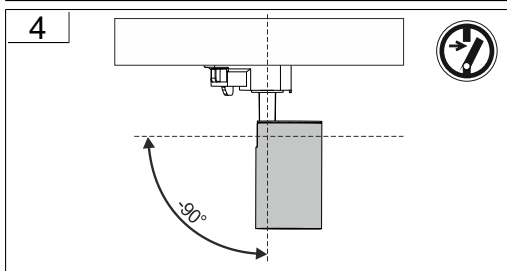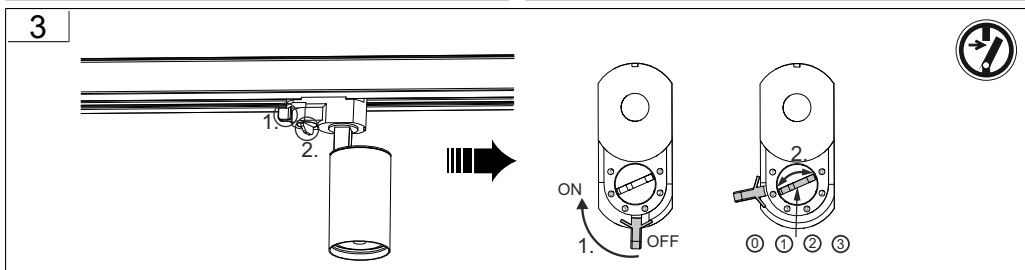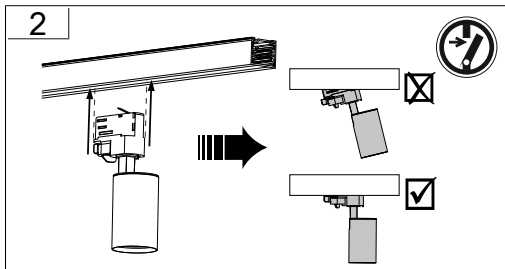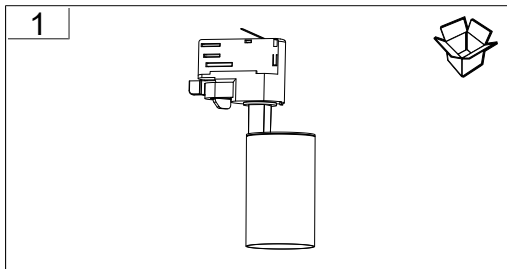



Clickbeam

	$I_n$	Power factor / Leistungsfaktor
742129.*	58 mA	> 0,9
742130.*	116 mA	> 0,9
742131.*	179 mA	> 0,9
742132.*	237 mA	> 0,9

Only to be installed outside  
arms reach. /

Nur zur Installation außerhalb  
des Handbereichs vorgesehen.

Die in dieser Leuchte enthaltene Lichtquelle darf nur vom Hersteller oder seinem Kundendienst oder einer ähnlich qualifizierten Person ersetzt werden. /

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



	982448.003	D 47, H 4,	1 g
--	------------	------------	-----







RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16  
96052 Bamberg

Telefon: 0951/7909-0  
Telefax: 0951/7909-198

E-mail: [info@rzb-leuchten.de](mailto:info@rzb-leuchten.de)