


LSA-Erddrahtleiste 2/38 38-polig

LSA earth module 2/38 38-pole

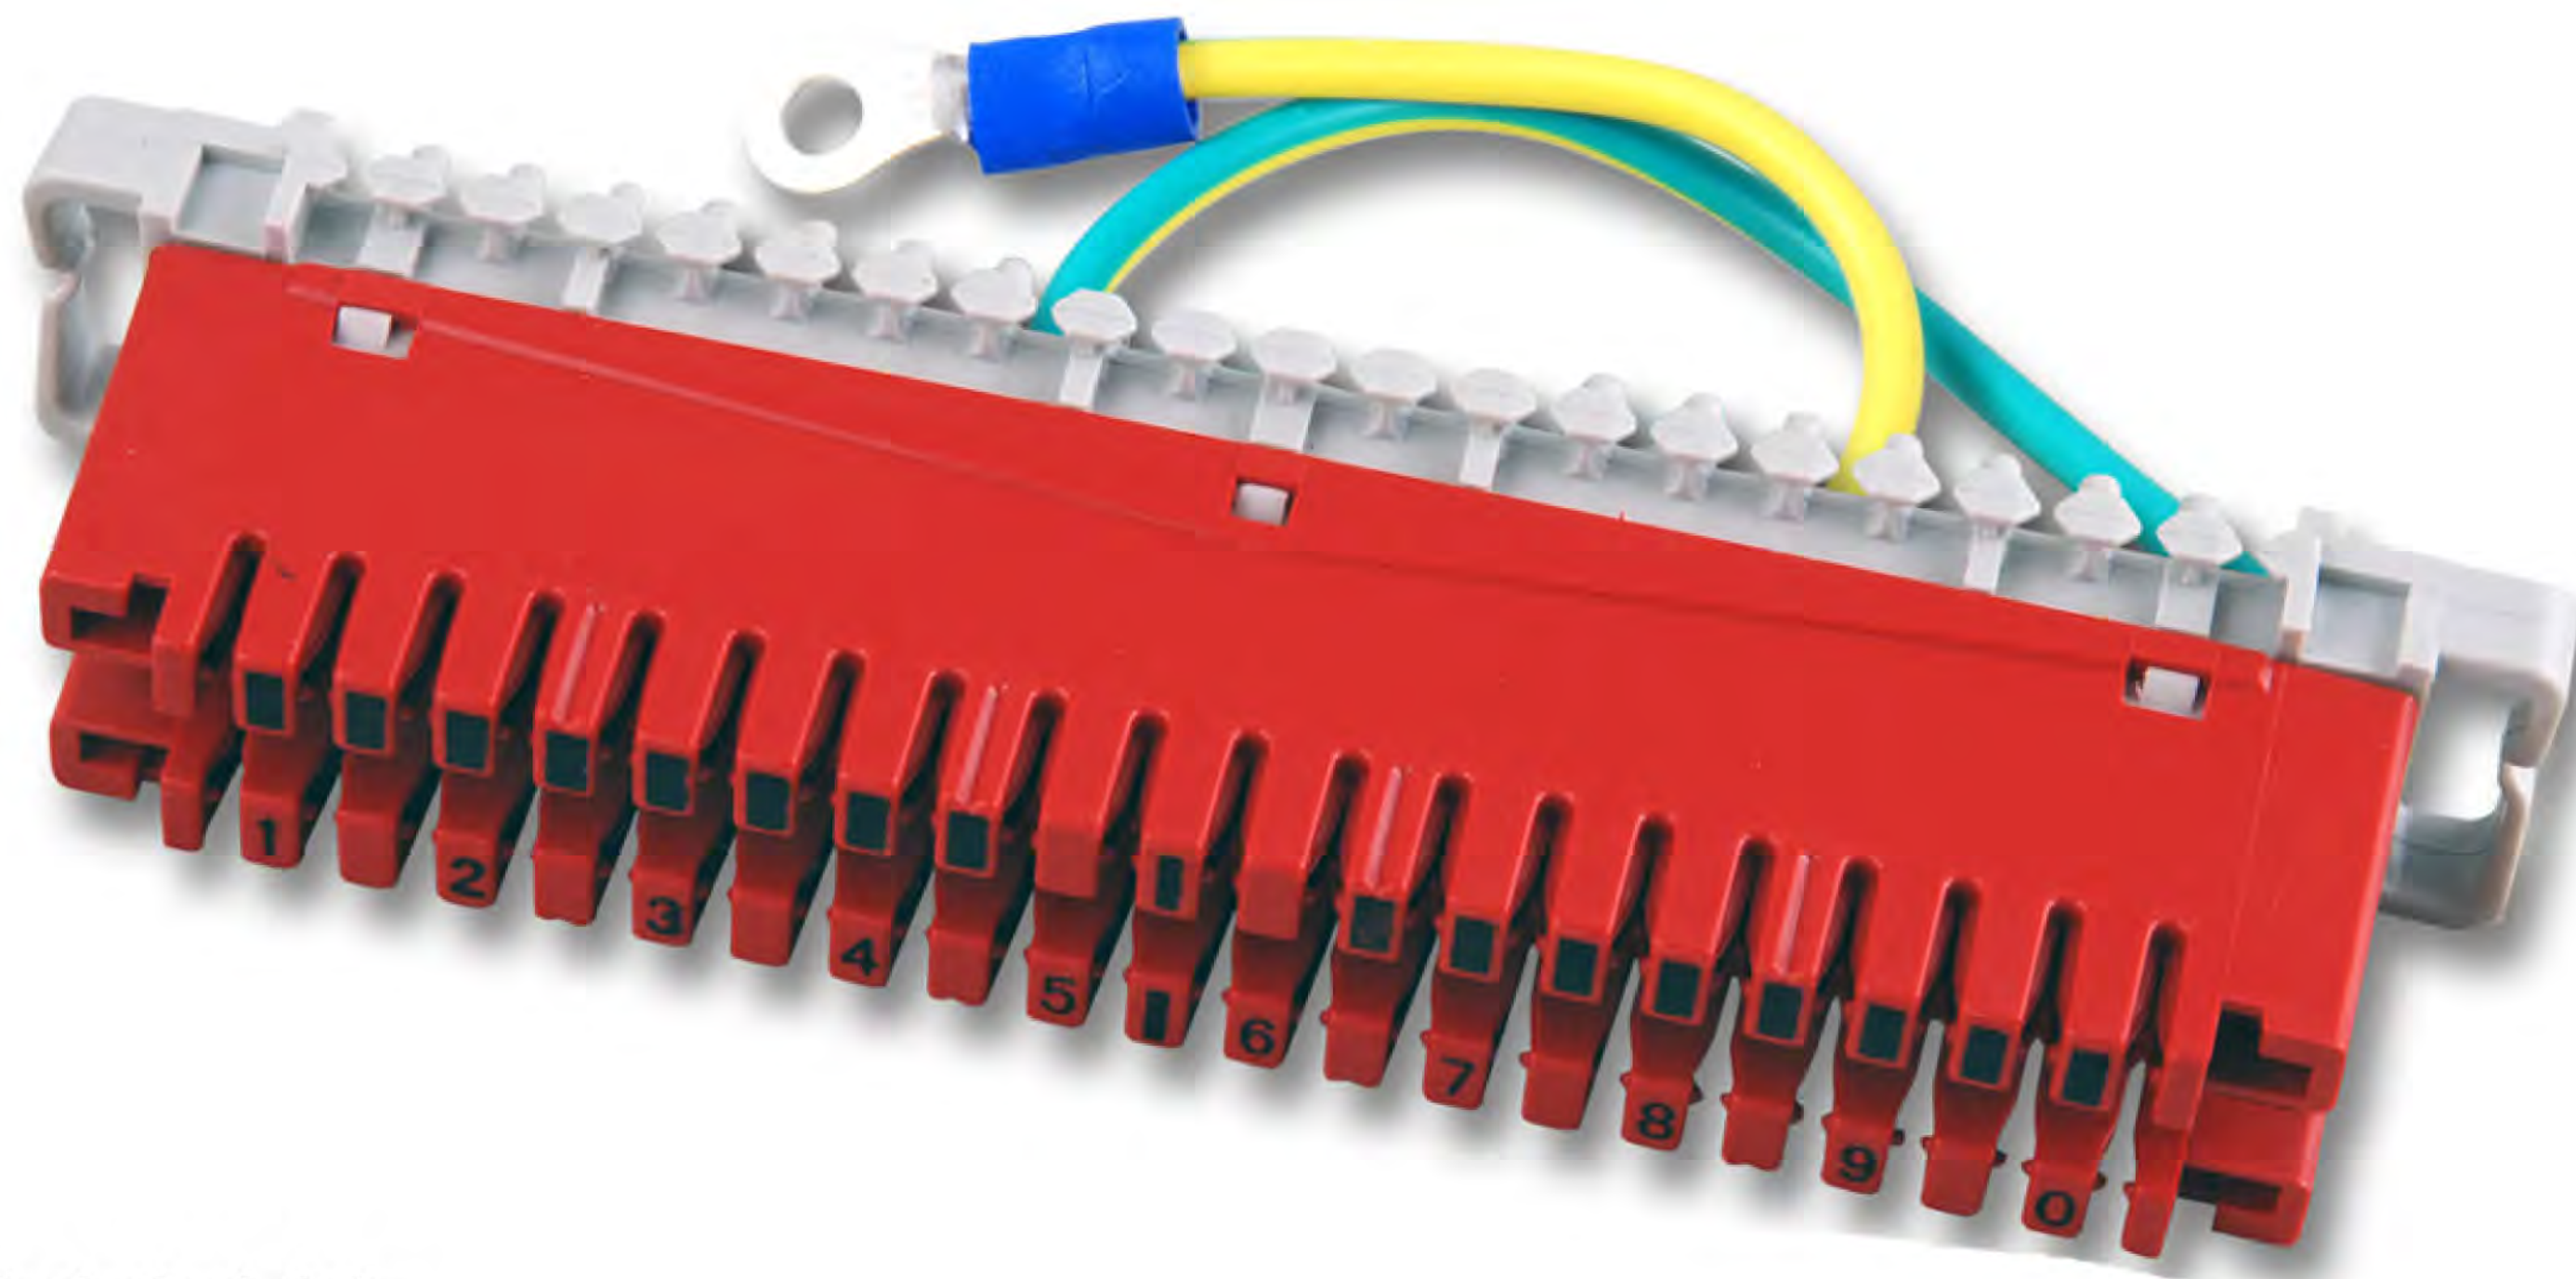

Technical data

- for use with backmount frames
- all contacts jumpered with the earth connection
- application of shielded and unshielded, 2 and 4 pairs cables
- routing eyes left and right

Clima area

Application in dry or humid rooms without condensation

- storage temperature..... -40 to +90 °C (-40 to 194 °F)
- operation temperature..... -20 to +80 °C (-4 to 176 °F)

CUSTOMER NO:	REMARK
item-number	46007.1

Mechanical data

- conductor diameter..... 0,40 to 0,80 mm
- external diameter..... 0,70 to 1,60 mm; AWG 26 to 20
- contact connection with 2 conductors (same diameter) from 0,50 to 0,65mm
- Repeatability..... ≥50x (with 2 conductor max. 20x)
- Contact material..... special brass with silver-plated composition in contact area ≥5µm
- material..... self-extinguishing polyester PBT
- flammability..... UL 94 V-0
- dimensions
 - width..... 123 mm
 - height..... 22 mm
 - depth..... 41 mm
- installation gauge..... 95 mm

Electrical data

The electrical parameter was tested by 4 days storing under constant conditions with 40 °C (104 °F) and 93 % relative humidity definite.

- insulating-resistance..... >50 GΩ
- contact- resistance <1 mΩ
- AC-Voltage..... 2 kV_{eff}
- impulse withstand voltage (wave form 8/20 µs)..... 3,6 kV
- ampacity..... 2A
- rated impulse ampacity..... 5 kA

⊕	MM	TITLE	
SCALE	✓	CUS. NAME	
SHEET	1/1	CUS. P/N	ENG. DATE
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		DRAW NO.	CHECKED DATE
.X±	.XX±		46007.1
.XXX±	ANGLE±		
REV.	CUS.REV		