

Dichteinsatz TPE TPS


Eigenschaften

Temperaturbereich


- für abgerundete Flachkabel
- 30 °C
+100 °C

Hinweis

montiert in den PERFECT Serien:
50.6xx MFK1, 50.6xx PAzzzzFK1

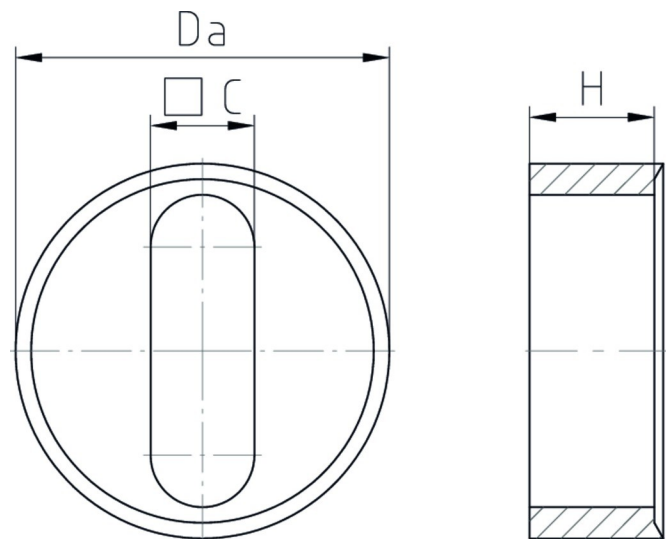

Merkmale

Größe	ØC	H	Da		Art.-Nr.
M20	5x12	7,5	15,1	50	WJ-DM 20FK1
M25	6x16,3	9,3	19,8	50	WJ-DM 25FK1
M32	9x20	12,5	25,1	25	WJ-DM 32FK1
M40	10x27	15	32,3	10	WJ-DM 40FK1
M50	13x34	17	41	5	WJ-DM 50FK1
M63	15x45	18	54	5	WJ-DM 63FK1