


Sechskantmutter

50.2xx ES

| | |
|-----------------|-------------------------|
| Sechskantmutter | Edelstahl 1.4305 |
| Innengewinde | metrisch, nach EN 60423 |


Eigenschaften


| | | |
|-------------------|-------------------|--|
| Temperaturbereich | -60 °C +200 °C | <ul style="list-style-type: none"> zum sicheren Befestigen von Kabelverschraubungen und Zubehörteilen |
|-------------------|-------------------|--|

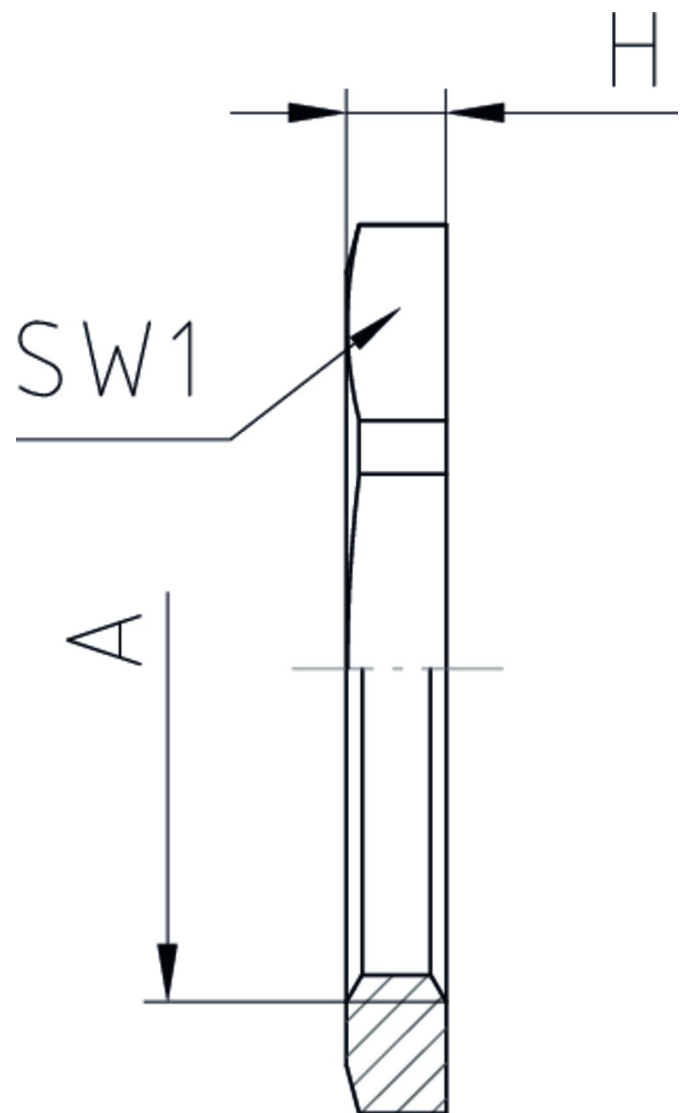

Merkmale

Standard

| A | SW1 | H |  | Art.-Nr. |
|---------|-----|-----|---|-----------|
| M12x1,5 | 14 | 2,8 | 50 | 50.212 ES |

| A | SW1 | H |  | Art.-Nr. |
|---------|-----|-----|---|-----------|
| M16x1,5 | 19 | 2,8 | 50 | 50.216 ES |
| M20x1,5 | 24 | 3 | 50 | 50.220 ES |
| M25x1,5 | 30 | 3,5 | 50 | 50.225 ES |
| M32x1,5 | 36 | 4 | 25 | 50.232 ES |
| M40x1,5 | 46 | 5 | 10 | 50.240 ES |
| M50x1,5 | 60 | 5 | 5 | 50.250 ES |
| M63x1,5 | 70 | 6 | 5 | 50.263 ES |